

MODEL:	SKU:
FAEMA X30 Autosteam S10	D6ARLB9BT999A
FAEMA X30 Milk PS CP10	D6BRPB9BT999A
Faema X30 Milk PS CS10	D6RMPB9BT999A

ENDLESS CUSTOMIZATION with a wide range of beverages, always the best quality in every cup.

X30

FEATURES



Up to 300 cups/day



Metal Group Head



Hot Frothed Milk



Cold Foamed Milk



Autosteam Cold Touch (Optional)



Capacitive Touchscreen Panel



AWS—Automatic Washing System



USB Port



Connectivity



Cup4You



HQ Cold & Hot Frothed Milk

The new X30 can prepare both hot or cold frothed milk (Snowmilk), thus expanding the menu with recipes made with coffee, hot chocolate, cold and hot frothed milk. With X30 you can savor hot and cold frothed milk like it was prepared by an expert hand: a unique experience!



aı

Connected and smart.



The 10.4" touchscreen display

The X30 has a customizable interface - with images, machine display, films and sounds to help the customer choose their drink are some of the features offered by the X30. All while being simple and intuitive.



Thanks to the Cup4You App, you can interact with your FAEMA X30 from your tablet or smartphone, customizing the drinks.

TECHNICAL DATA





New Titanium

Made of K110 steel with a PVD coating, are very robust and designed to last for a long time.



SMARTBOILER

One copper boiler with 2.0L capacity and a heat exchanger of 230 ml. 2.600W new resistance SmartBoiler function, Guarantees high performance for hot water and steam.



Hoppers and Solubles

Dual 1/1.2 kilo bean hoppers allow for multiple blends of coffee to be served. The X30 CS10 with its integrated soluble chocolate system provides the optimal way to expand your menu, delight your guests, and increase your revenue and profitability.



The Faema X30 will transform your coffee program into a way of delighting your guests that separates you from your competition, and keeps them coming back for more phenomenal coffee.



Be sure to tell us if your machine will be self-serve/customer facing or operated by your staff. If it's customer facing, we'll turn off and remove the steam arm before it ships. This will ensure that your guests can't be burned by the steam arm.

X30	S10 + CP10	CS10					
Features							
Steam wands	1	1					
Auto steam wands	1	-					
Hot water wands	1	1					
Hot water selections	2	2					
Boiler × Boiler capacity (L)	1 × 0.7 L + 1 × 1.25 L	1 × 0.7 L + 1 × 1.25 L					
Coffee dosing grinders	2	2					
Coffee bean hopper × capacity (kg)	2 × 1.2	2 × 1.2					
Solubles hopper × capacity (kg)	-	1 × 1					
Technical Information							
Dimensions: W × D × H (in)	14.6 × 24.4 × 30	14.6 × 24.4 × 30					
Weight (lbs)	175	175					
Power at 220-240V~60Hz (W)	4800 - 5700	4800 - 5700					

Water & Drain Line Requirements

Cold Water Line:

3/8" dedicated cold water line with shut-off valve and compression fitting.

Water Flow:

Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/5 Bar. Should flow pressure exceed 70 PSI, a pressure reducer is necessary.

Drain:

Open gravity drain of minimum 2" ID size for hose, within 4 feet of machine.

Access Hole:

There must be a 4" access hole underneath the machine to connect the water, drain and power supply. See CAD drawings for recommended hole placement.


















Espresso Soci, Inc. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be color deviations due to the printing process.





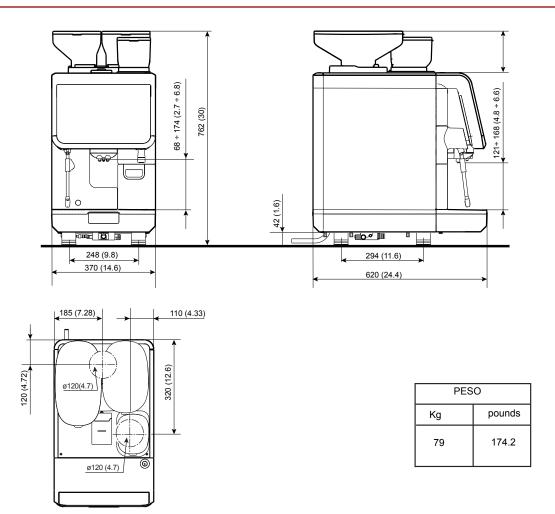

	ALIMENTAZIONE ELETTRICA POWER SUPPLY	POTENZA INSTALLATA INSTALLED POWER	CORRENTE DI LINEA LINE POWER	SEZIONE CAVO ALIMENTAZIONE SUPPLY CABLE SECTION
MACCHINA MACHINE	220-240V 50Hz 220V 60Hz	4,8-5,7 kW 4,8 kW	24A	min. 3x4mm²
	380-415V3N 50Hz 380V3N 60Hz	4,8-5,7 kW 4,8 kW	12A	min. 5x1,5mm²
	220-240V3 50Hz 220V3 60Hz	4,8-5,7 kW 4,8 kW	19A	min. 4x2,5mm²
	208-240V 60Hz	4,4-5,9 kW	25A (plug 50A)	min. 3x2,5mm² (12/3 AWG)

INTERRUTTORE - Omnipolare con distanza di

apertura contatti 3mm

- Protezione da corrente di dispersione

con valore pari a 30 mA

MESSA A TERRA - Obbligatoria

ALLACCIAMENTO- ø 3/8 gas

IDRAULICO

PRESSIONE DI

ALIMENTAZIONE - 0-6 bar

IDRAULICA

SCARICO - ø min. 50mm

IDRAULICO

SWITCH

- Omnipolar, 3mm opening contact distance

- Protection from leakage current with a value

equal to 30mA

- ø 3/8 gas

GROUNDING - Required

HYDRAULIC

CONNECTION

HYDRAULIC - 0 ÷ 6 bar (0.6 MPa)

FEEDING PRESSURE

WATER DISCHARGE - ø min. 50mm