GROUNDBREAKER



DATE MODEL: SKU: **GROUNDBREAKER** GZFBRZ9B7999A **PROJECT**

LOCATION

Guaranteed the **BEST QUALITY** in the cup.

GROUNDBREAKER

FEATURES



4.3" LCD Touch Screen



New Motor with Inverter



Autotamper



Perfect Grinding System (PGS)



Flat Burrs with Red **Speed Treatment**



Innovative Design



USB Port



Bluetooth



Barista Drive System (BDS)



The compact, elegant design

is fitted with a new motor equipped with an Inverter, with low energy expenditure, which guarantees constant performance over time even after intensive use. Groundbreaker's compact size enables optimal use even in small spaces.





Groundbreaker can interface with the most advanced FAEMA machines. It most naturally combines with the E71 and the President series.

TECHNICAL DATA





The Groundbreaker 4.3" touchscreen display is easy to use and completely customizable



Get the desired result every time by simply adjusting the **Groundbreaker's grinders**

Baristas can choose and configure the programs thanks to a selection of customized settings. With Groundbreaker, you can quickly access the components of the product to check its status, make the appropriate adjustments, and implement the cleaning cycle in total safety and with simple operations performed by a specialized technician.

The perfectly balanced hopper

can be placed in a stable position on the worktop, making it easier to refill the Groundbreaker and simplify its cleaning and adjustment.

	GROUNDBREAKER	with AUTOTAMPER			
Features					
Output g/s	3.5-4.1	3.5-4.1			
Hopper capacity (Kg - Ibs)	1.5 - 3.31	1.5 - 3.31			
Diameter burrs (in)	2.52	2.52			
Red Speed Treatment	Yes	Yes			
Technical Information					
Dimensions: W × D × H (in)	8.47 × 18.46 × 22.92	8.47 × 18.46 × 22.92			
Weight (lbs)	41.8	50.7			
Power at 110-120V~60Hz (A)	4.1	4.1			
Motor Service	15s ON 20s OFF	15s ON 20s OFF			

your job easier




















GROUNDBREAKER



Espresso Soci, Inc. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be color deviations due to the printing process.



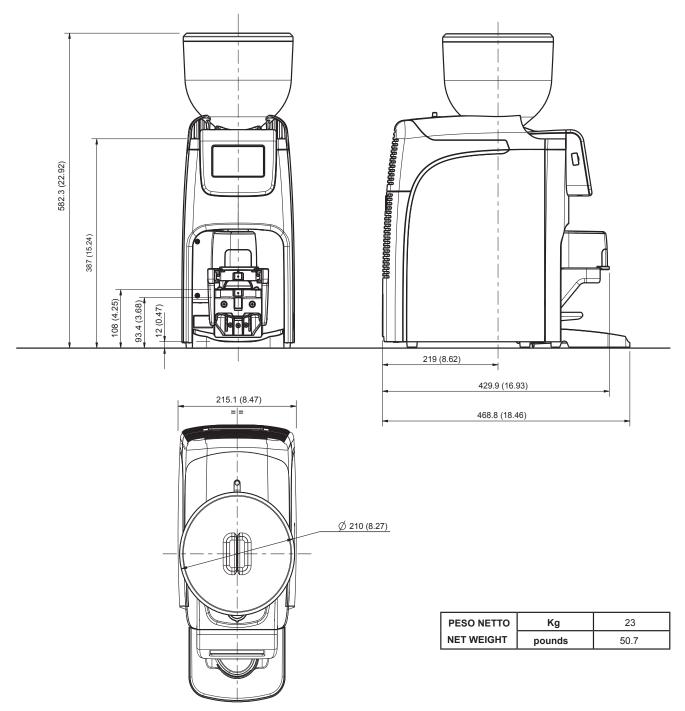

	ALIMENTAZIONE ELETTRICA POWER SUPPLY			SEZIONE CAVO ALIMENTAZIONE SUPPLY CABLE SECTION
	200 - 240 V 50/60 Hz	320 W	15s ON / 20s OFF	min. 3 x 0,75 mm²

INTERRUTTORE

- Omnipolare con distanza di apertura contatti 3mm

- Protezione da corrente di dispersione con valore pari a 30 mA

MESSA A TERRA - Obbligatoria

SWITCH

- Omnipolar, 3mm opening contact distance

- Protection from leakage current with a value equal to 30mA

GROUNDING

- Required